

NUOMI




HIGH-END SMART LIGHTING SYSTEM



LIGHT CREATIVE CUSTOMIZATION



NUOMI lighting concept brings more personal experience and comfort to life, forms the use of artistic visual expression, leads lifestyles, meets high-end needs, and finds the most suitable lighting products for your home.

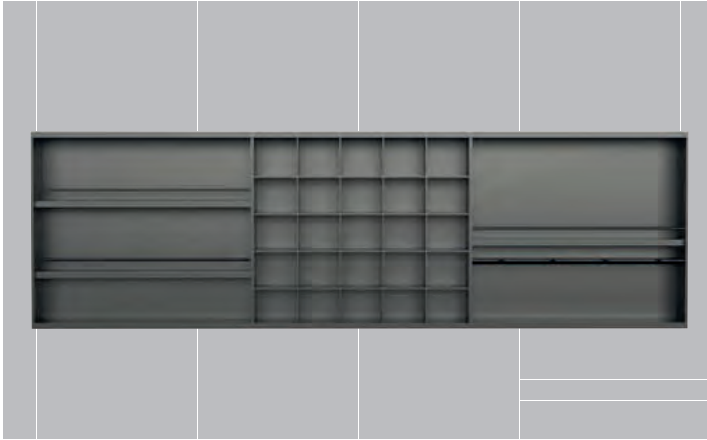

FEATURES

- Adjustable light color temperature and brilliance, lighting balance, service life over 70000 hours.
- LGP imported from Mitsubishi of Japan, lighting balance.
- Customized size, embedded cabinet, plugin alternating current voltage.
- Anodised aluminium, strong loadbearing, Aluminium profile, waterborne fluorocarbon coating technology.
- Ra>90.




COLOR TEMPERATURE ADJUSTABLE






TECHNICAL DETAILS

Color Temperature	Product Name	Item No.	Size (mm)	Power	Sensor switch
		Bordeaux red Champagne golden Highclass grey Pure white Matte black			
(3000K、4000K、6000K)	Basic set	12130111 12130112 12130113 12130114 12130115	custom size	10W/m	
	Basic+cross rack set	12130121 12130122 12130123 12130124 12130125	custom size	10W/m	exclude power source and sensor switch
	Basic+glass shelf set	12130131 12130132 12130133 12130134 12130135	custom size	10W/m	
	Basic set	12130211 12130212 12130213 12130214 12130215	custom size	10W/m	exclude power source and sensor switch
	Basic+cross rack set	12130221 12130222 12130223 12130224 12130225	custom size	10W/m	include 5mm LGP
	Basic+glass shelf set	12130231 12130232 12130233 12130234 12130235	custom size	10W/m	


Module Of Product

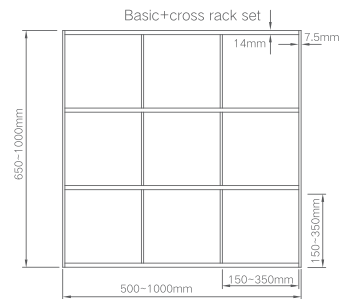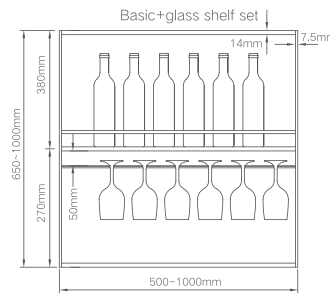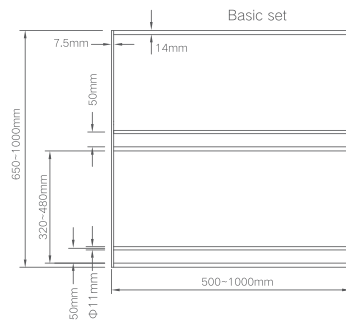

Design Reference

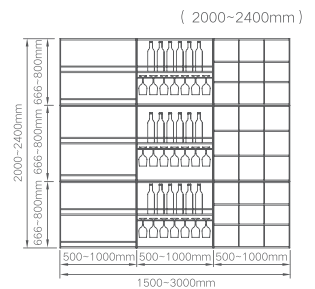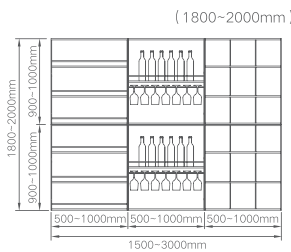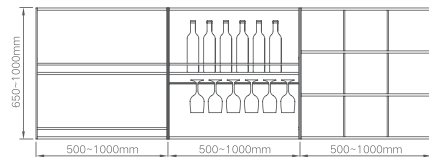




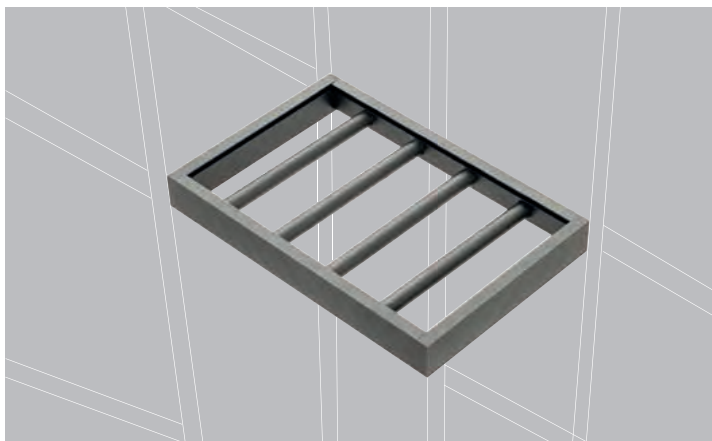

FEATURES

- Adjustable light color temperature and brilliance, lighting balance, service life over 70000 hours.
- Ra>90.



COLOR TEMPERATURE ADJUSTABLE

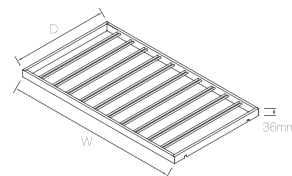

TECHNICAL DETAILS

Color Temperature	Item No.	Aluminium color	Size (mm)	Power	Sensor switch
(3000K, 4000K, 6000K)	13067011	bordeaux red	(W600-1000)x(D600)xH36	10W/m	no sensor switch (external available)
	13067012	champagne gold	(W600-1000)x(D600)xH36	10W/m	
	13067013	high-class grey	(W600-1000)x(D600)xH36	10W/m	



ALUMINUM FRAME GLASS SHELF WITH LIGHT

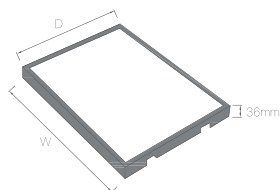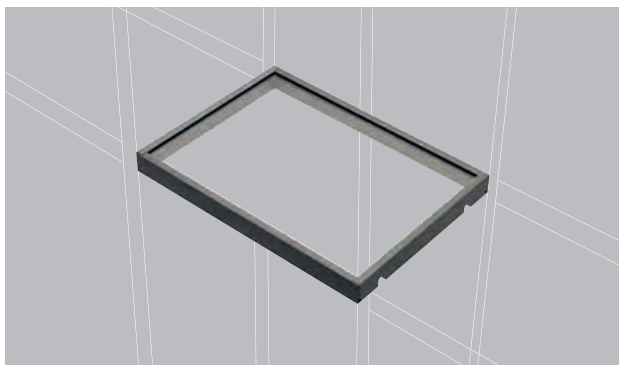

TECHNICAL DETAILS

Item No.	Aluminium color	Glass color	Size (mm)
13068011	bordeaux red	amber-yellow glass	(D600)xH36x(W300-1000)
13068012	champagne gold	amber-yellow glass	(D600)xH36x(W300-1000)
13068013	high-class grey	grey glass	(D600)xH36x(W300-1000)

ALUMINUM FRAME GLASS SHELF WITH LIGHT AND HANGING ROD

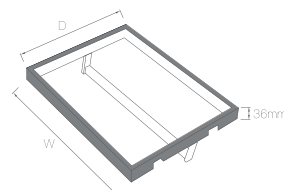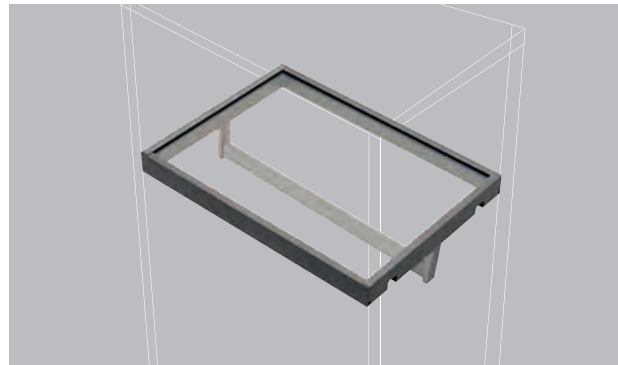

TECHNICAL DETAILS

Item No.	Aluminium color	Glass color	Size (mm)
13068021	bordeaux red	amber-yellow glass	(D600)xH36x(W600-1000)
13068022	champagne gold	amber-yellow glass	(D600)xH36x(W600-1000)
13068023	high-class grey	grey glass	(D600)xH36x(W600-1000)




BRIGHT AND ELEGANT



ARES LIGHT

- Minimalism ultra narrow strip lights, follow current trend, minimalism light luxury style.
- Ultra narrow luminous surface area 5.8Mm.
- High quality pc lampshade, uv resistant, lighting balance, soft for eyes.



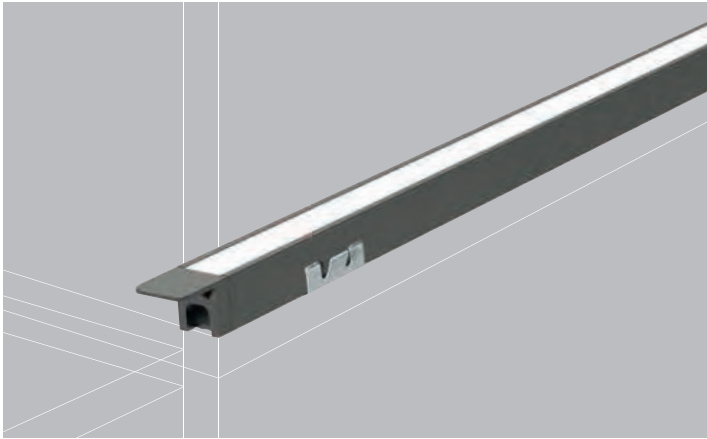


FEATURES

- Adjustable or Optional color temperature (3000K、4000K、6000K) , Adjustable brilliance,lighting balance, service life over 70000 hours.
- Built-in type installation, cuttable length, Lighting balance.
- PC lampshade, ultra-narrow design and has no crystal points. Suitable for side board or layered board.
- Ra>90.

COLOR TEMPERATURE ADJUSTABLE




INSTALLATION INSTRUCTIONS

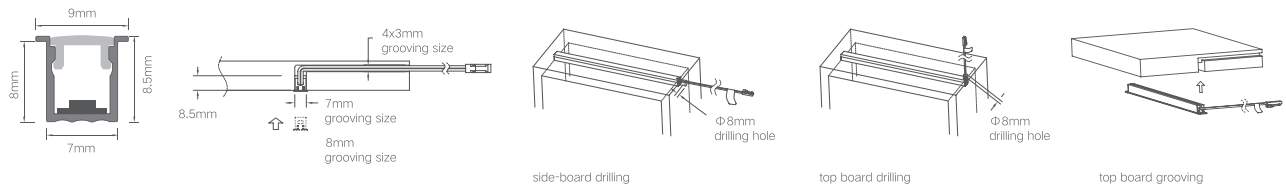

TECHNICAL DETAILS

Color Temperature	Item No.	Size (mm)	Power	Remark	
	Highclass grey	Matte black			
(3000K、4000K、6000K)	12310043	12310045	400mm	4W	
	12310063	12310065	600mm	6W	
	12310083	12310085	800mm	8W	
	12310103	12310105	1000mm	10W	
	12310123	12310125	1200mm	12W	
	12310153	12310155	1500mm	15W	
	12310183	12310185	1800mm	18W	both ends bonding wire with 2pcs of end cap
3000K	12310283	12310285	2800mm	28W	
	12313043	12313045	400mm	4W	
	12313063	12313065	600mm	6W	
	12313083	12313085	800mm	8W	
	12313103	12313105	1000mm	10W	
	12313123	12313125	1200mm	12W	
	12313153	12313155	1500mm	15W	both ends bonding wire with 2pcs of end cap
4000K	12313183	12313185	1800mm	18W	
	12313283	12313285	2800mm	28W	
	12314043	12314045	400mm	4W	
	12314063	12314065	600mm	6W	
	12314083	12314085	800mm	8W	
	12314103	12314105	1000mm	10W	
	12314123	12314125	1200mm	12W	both ends bonding wire with 2pcs of end cap
	12314153	12314155	1500mm	15W	
	12314183	12314185	1800mm	18W	
	12314283	12314285	2800mm	28W	
	12319991	bordeaux red	/	/	custom size
	12319992	champagne gold	/	/	custom size



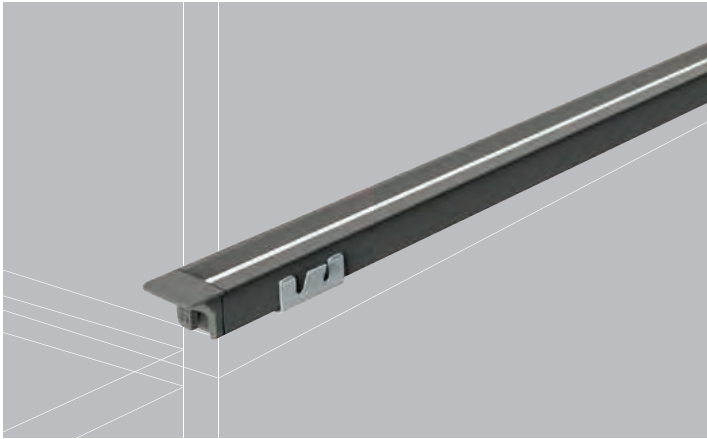


FEATURES

- Adjustable or Optional color temperature (3000K、4000K、6000K) , Adjustable brilliance,lighting balance, service life over 70000 hours.
- Cutable length.
- PC lampshade, ultra-narrow design and has no crystal points.
- Ra>90.

COLOR TEMPERATURE ADJUSTABLE



INSTALLATION INSTRUCTIONS

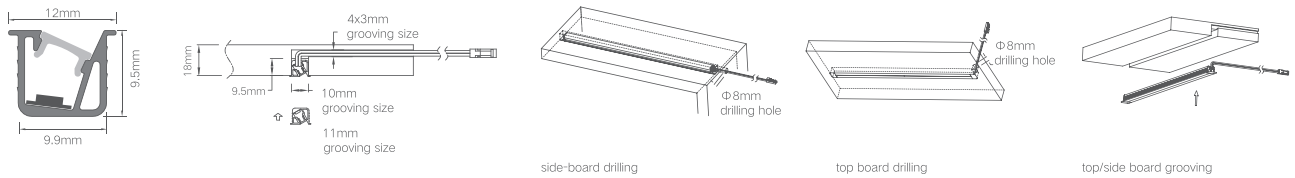


TECHNICAL DETAILS

Color Temperature	Item No.	Size (mm)	Power	Remark	
	Highclass grey	Matte black			
(3000K、4000K、6000K)	12320043	12320045	400mm	4W	
	12320063	12320065	600mm	6W	
	12320083	12320085	800mm	8W	
	12320103	12320105	1000mm	10W	
	12320123	12320125	1200mm	12W	
	12320153	12320155	1500mm	15W	
	12320183	12320185	1800mm	18W	
	12320283	12320285	2800mm	28W	both ends bonding wire with 2pcs of end cap
3000K	12323043	12323045	400mm	4W	
	12323063	12323065	600mm	6W	
	12323083	12323085	800mm	8W	
	12323103	12323105	1000mm	10W	
	12323123	12323125	1200mm	12W	
	12323153	12323155	1500mm	15W	
	12323183	12323185	1800mm	18W	
	12323283	12323285	2800mm	28W	both ends bonding wire with 2pcs of end cap
4000K	12324043	12324045	400mm	4W	
	12324063	12324065	600mm	6W	
	12324083	12324085	800mm	8W	
	12324103	12324105	1000mm	10W	
	12324123	12324125	1200mm	12W	
	12324153	12324155	1500mm	15W	
	12324183	12324185	1800mm	18W	
	12324283	12324285	2800mm	28W	both ends bonding wire with 2pcs of end cap
	12329991	bordeaux red	/	/	custom size
	12329992	champagne gold	/	/	custom size



SEURAT
POLLOCK
SEURAT
POLLOCK
SEURAT
POLLOCK
SEURAT
POLLOCK

DONATELLA VERSACE
INNENARCHITEKTUR

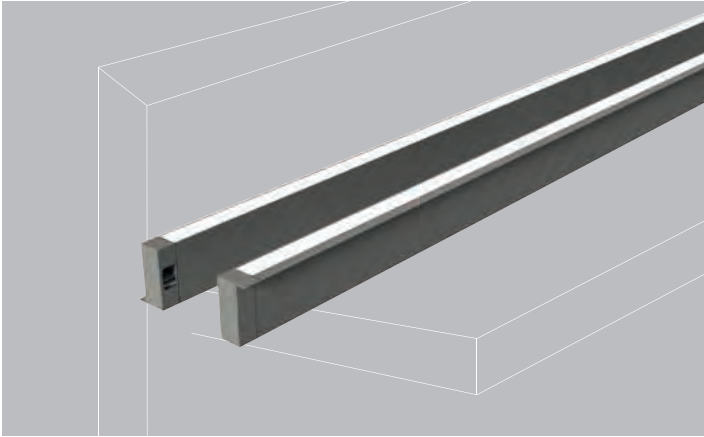




FEATURES

- Adjustable or Optional color temperature (3000K、 4000K、 6000K) , Adjustable brilliance,lighting balance, service life over 70000 hours.
- Cutable length, concealed installation in the rear of layered board.
- PC lampshade, ultra-narrow design and has no crystal points.
- Ra>90.

COLOR TEMPERATURE ADJUSTABLE



INSTALLATION INSTRUCTIONS



TECHNICAL DETAILS

Color Temperature	Item No.	Size (mm)	Power	Remark	
	Highclass grey	Matte black			
(3000K、 4000K、 6000K)	12340043	12340045	400mm	8W	
	12340063	12340065	600mm	12W	
	12340083	12340085	800mm	16W	
	12340103	12340105	1000mm	20W	
	12340123	12340125	1200mm	24W	
	12340153	12340155	1500mm	30W	
	12340183	12340185	1800mm	36W	
3000K	12343043	12343045	400mm	8W	
	12343063	12343065	600mm	12W	
	12343083	12343085	800mm	16W	
	12343103	12343105	1000mm	20W	
	12343123	12343125	1200mm	24W	
	12343153	12343155	1500mm	30W	
	12343183	12343185	1800mm	36W	
4000K	12344043	12344045	400mm	8W	
	12344063	12344065	600mm	12W	
	12344083	12344085	800mm	16W	
	12344103	12344105	1000mm	20W	
	12344123	12344125	1200mm	24W	
	12344153	12344155	1500mm	30W	
	12344183	12344185	1800mm	36W	
	12349991	bordeaux red	/	/	custom size
	12349992	champagne gold	/	/	custom size



DONATELLA VERSACE
DONATELLA VERSACE
INNENARCHITEKTUR
INNENARCHITEKTUR


FOR SURVIVAL SEURAT
FOR SURVIVAL SEURAT
SEURAT
SEURAT

DONATELLA
INNENARCHITEKTUR

DONATELLA VERSACE
DONATELLA VERSACE
DONATELLA VERSACE
DONATELLA VERSACE
ART FOR SURVIVAL



NUOMI

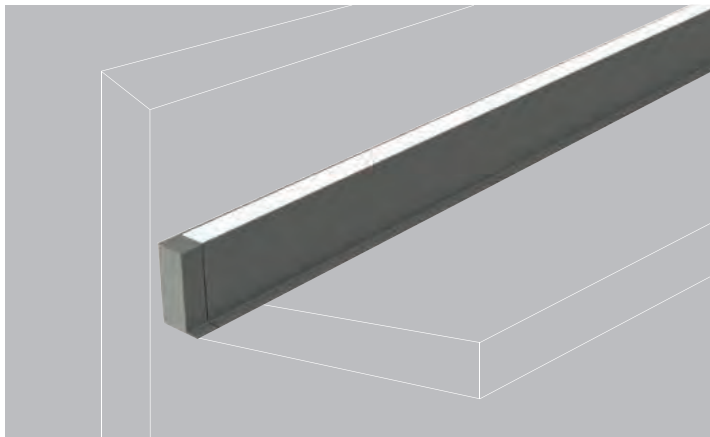




FEATURES

- Adjustable or Optional color temperature (3000K、4000K、6000K) , Adjustable brilliance,lighting balance, service life over 70000 hours.
- Cutable length, concealed installation in the rear of layered board.
- PC lampshade, ultra-narrow design and has no crystal points.
- Ra>90.

COLOR TEMPERATURE ADJUSTABLE



INSTALLATION INSTRUCTIONS



TECHNICAL DETAILS

Color Temperature	Item No.	Size (mm)	Power	Remark	
	Highclass grey	Matte black			
(3000K、4000K、6000K)	12350043	12350045	400mm	4W	
	12350063	12350065	600mm	6W	
	12350083	12350085	800mm	8W	
	12350103	12350105	1000mm	10W	
	12350123	12350125	1200mm	12W	
	12350153	12350155	1500mm	15W	
	12350183	12350185	1800mm	18W	both ends bonding wire with 2pcs of end cap
	12350283	12350285	2800mm	28W	
3000K	12353043	12353045	400mm	4W	
	12353063	12353065	600mm	6W	
	12353083	12353085	800mm	8W	
	12353103	12353105	1000mm	10W	
	12353123	12353125	1200mm	12W	
	12353153	12353155	1500mm	15W	
	12353183	12353185	1800mm	18W	both ends bonding wire with 2pcs of end cap
	12353283	12353285	2800mm	28W	
4000K	12354043	12354045	400mm	4W	
	12354063	12354065	600mm	6W	
	12354083	12354085	800mm	8W	
	12354103	12354105	1000mm	10W	
	12354123	12354125	1200mm	12W	
	12354153	12354155	1500mm	15W	
	12354183	12354185	1800mm	18W	both ends bonding wire with 2pcs of end cap
	12354283	12354285	2800mm	28W	
	12359991	bordeaux red	/	/	custom size
	12359992	champagne gold	/	/	custom size



ALTERNATIVE DEC
CAMPION BOOKS
CAMPION BOOKS
CAMPION BOOKS


ALTERNATIVE DEC
CAMPION BOOKS
CAMPION BOOKS
CAMPION BOOKS

ALTERNATIVE DEC
CAMPION BOOKS
CAMPION BOOKS
CAMPION BOOKS

Elliott Erwitt Suspe

Bananas
SOME ARE SICKER THAN OTHERS
ANDREW SEAWARD

NUOMI

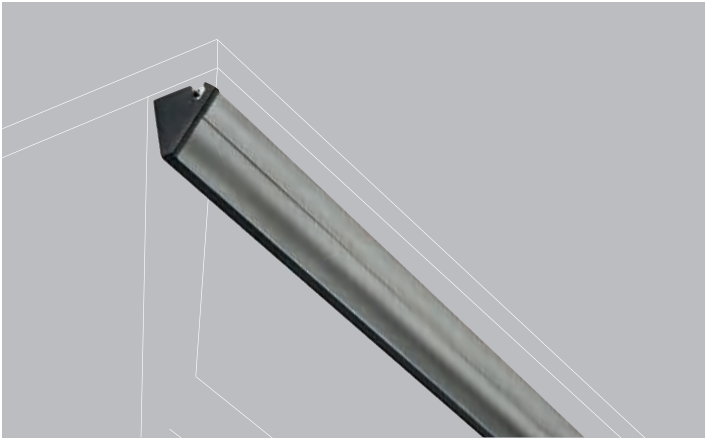


FEATURES

- Adjustable or Optional color temperature (3000K、4000K、6000K) , Adjustable brilliance,lighting balance, service life over 70000 hours.
- Cutable length, concealed installation in the rear of layered board.
- PC lampshade, ultra-narrow design and has no crystal points.
- Ra>90.

COLOR TEMPERATURE ADJUSTABLE




INSTALLATION INSTRUCTIONS




1. clip-on assembly




accessory position



Top drilling hole for wire



Side drilling hole for wire



Sticker attach

TECHNICAL DETAILS

Color Temperature	Item No.	Size (mm)	Power	Remark	
	Highclass grey	Matte black			
(3000K、4000K、6000K)	12360043	12360045	400mm	4W	
	12360063	12360065	600mm	6W	
	12360083	12360085	800mm	8W	
	12360103	12360105	1000mm	10W	
	12360123	12360125	1200mm	12W	
	12360153	12360155	1500mm	15W	
	12360183	12360185	1800mm	18W	both ends bonding wire with 2pcs of end cap
	12360283	12360285	2800mm	28W	
3000K	12363043	12363045	400mm	4W	
	12363063	12363065	600mm	6W	
	12363083	12363085	800mm	8W	
	12363103	12363105	1000mm	10W	
	12363123	12363125	1200mm	12W	
	12363153	12363155	1500mm	15W	
	12363183	12363185	1800mm	18W	both ends bonding wire with 2pcs of end cap
	12363283	12363285	2800mm	28W	
4000K	12364043	12364045	400mm	4W	
	12364063	12364065	600mm	6W	
	12364083	12364085	800mm	8W	
	12364103	12364105	1000mm	10W	
	12364123	12364125	1200mm	12W	
	12364153	12364155	1500mm	15W	
	12364183	12364185	1800mm	18W	both ends bonding wire with 2pcs of end cap
	12364283	12364285	2800mm	28W	
	12369991	bordeaux red	/	/	custom size
	12369992	champagne gold	/	/	custom size









FEATURES

- Adjustable or Optional color temperature (3000K、4000K、6000K) , Adjustable brilliance, lighting balance, service life over 70000 hours.
- Ultra-thin wire, no need drilling hole, Cuttable length.
- PC lampshade, ultra-narrow design and has no crystal points.
- Ra>90.

COLOR TEMPERATURE ADJUSTABLE



INSTALLATION INSTRUCTIONS

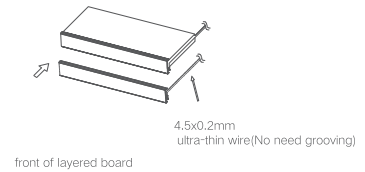

TECHNICAL DETAILS

Color Temperature	Item No.	Size (mm)	Power	Remark
	Highclass grey Matte black			
(3000K、4000K、6000K)	12370043 12370045	400mm	4W	
	12370063 12370065	600mm	6W	
	12370083 12370085	800mm	8W	
	12370103 12370105	1000mm	10W	
	12370123 12370125	1200mm	12W	both ends bonding wire
3000K	12373043 12373045	400mm	4W	
	12373063 12373065	600mm	6W	
	12373083 12373085	800mm	8W	
	12373103 12373105	1000mm	10W	
	12373123 12373125	1200mm	12W	both ends bonding wire
4000K	12374043 12374045	400mm	4W	
	12374063 12374065	600mm	6W	
	12374083 12374085	800mm	8W	
	12374103 12374105	1000mm	10W	
	12374123 12374125	1200mm	12W	both ends bonding wire
	12379991 bordeaux red	/	/	custom size
	12379992 champagne gold	/	/	custom size




MUSE LIGHT



It comes with a soft filter effect to create a sense of intimacy and form an active atmosphere. With the adjustment of low light, the sense of warmth slowly rises, and the space becomes full and beautiful.



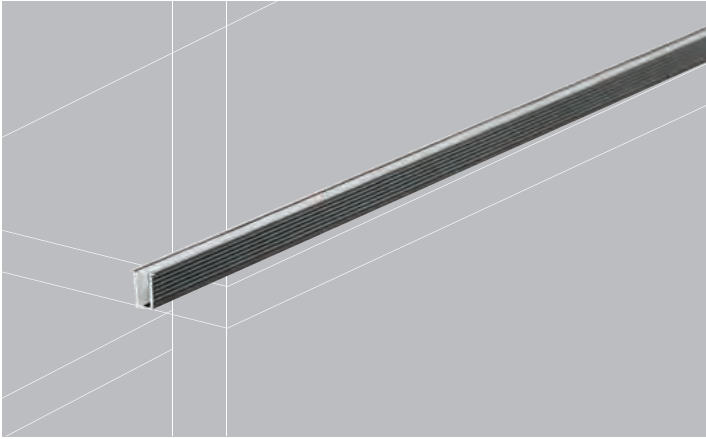


FEATURES

- Adjustable or Optional color temperature (3000K、4000K、6000K) , Adjustable brilliance,lighting balance, service life over 70000 hours.
- Cutable length.
- Silicone lampshade, ultra-narrow design.
- Ra>90.

COLOR TEMPERATURE ADJUSTABLE




INSTALLATION INSTRUCTIONS

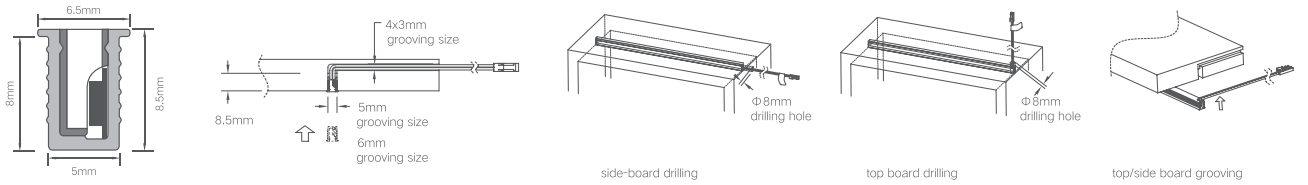

TECHNICAL DETAILS

Color Temperature	Item No.	Size (mm)	Power	Remark	
	Highclass grey	Matte black			
(3000K、4000K、6000K)	12410043	12410045	400mm	4W	
	12410063	12410065	600mm	6W	
	12410083	12410085	800mm	8W	
	12410103	12410105	1000mm	10W	
	12410123	12410125	1200mm	12W	
	12410153	12410155	1500mm	15W	
	12410183	12410185	1800mm	18W	both ends bonding wire
	12410283	12410285	2800mm	28W	
3000K	12413043	12413045	400mm	4W	
	12413063	12413065	600mm	6W	
	12413083	12413085	800mm	8W	
	12413103	12413105	1000mm	10W	
	12413123	12413125	1200mm	12W	
	12413153	12413155	1500mm	15W	
	12413183	12413185	1800mm	18W	both ends bonding wire
	12413283	12413285	2800mm	28W	
4000K	12414043	12414045	400mm	4W	
	12414063	12414065	600mm	6W	
	12414083	12414085	800mm	8W	
	12414103	12414105	1000mm	10W	
	12414123	12414125	1200mm	12W	
	12414153	12414155	1500mm	15W	
	12414183	12414185	1800mm	18W	both ends bonding wire
	12414283	12414285	2800mm	28W	
	12419991	bordeaux red	/	/	custom size
	12419992	champagne gold	/	/	custom size



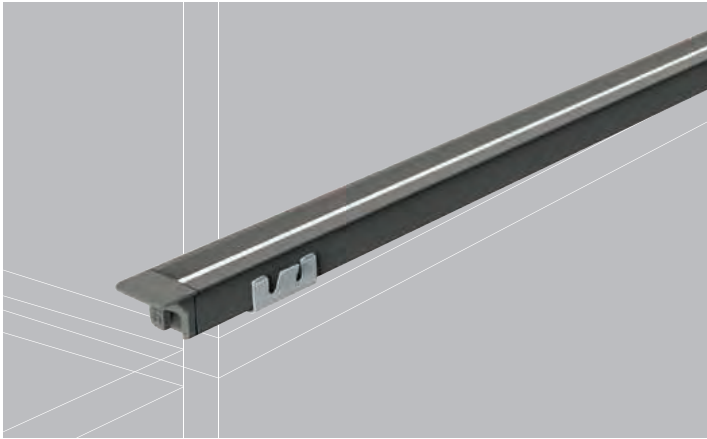


FEATURES

- Adjustable or Optional color temperature (3000K、 4000K、 6000K) , Adjustable brilliance,lighting balance, service life over 70000 hours.
- Cutable length.
- Silicone lampshade, ultra-narrow design.
- 45 ° refractive lighting.
- Ra>90.

COLOR TEMPERATURE ADJUSTABLE




INSTALLATION INSTRUCTIONS

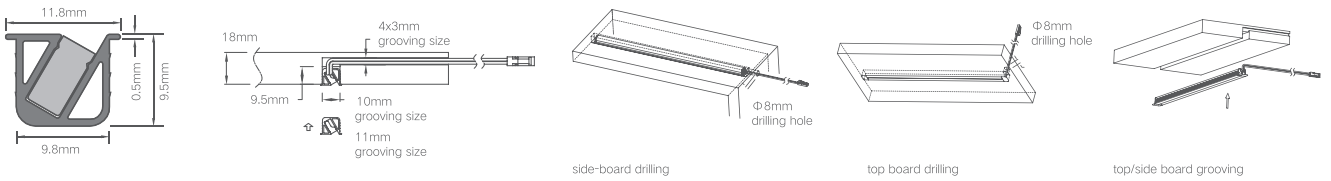

TECHNICAL DETAILS

Color Temperature	Item No.	Size (mm)	Power	Remark	
	Highclass grey	Matte black			
(3000K、 4000K、 6000K)	12420043	12420045	400mm	4W	
	12420063	12420065	600mm	6W	
	12420083	12420085	800mm	8W	
	12420103	12420105	1000mm	10W	
	12420123	12420125	1200mm	12W	
	12420153	12420155	1500mm	15W	
	12420183	12420185	1800mm	18W	both ends bonding wire with 2pcs of end cap
3000K	12420283	12420285	2800mm	28W	
	12423043	12423045	400mm	4W	
	12423063	12423065	600mm	6W	
	12423083	12423085	800mm	8W	
	12423103	12423105	1000mm	10W	
	12423123	12423125	1200mm	12W	
	12423153	12423155	1500mm	15W	both ends bonding wire with 2pcs of end cap
4000K	12423183	12423185	1800mm	18W	
	12423283	12423285	2800mm	28W	
	12424043	12424045	400mm	4W	
	12424063	12424065	600mm	6W	
	12424083	12424085	800mm	8W	
	12424103	12424105	1000mm	10W	
	12424123	12424125	1200mm	12W	both ends bonding wire with 2pcs of end cap
	12424153	12424155	1500mm	15W	
	12424183	12424185	1800mm	18W	
	12424283	12424285	2800mm	28W	
	12429991	bordeaux red	/	/	custom size
	12429992	champagne gold	/	/	custom size



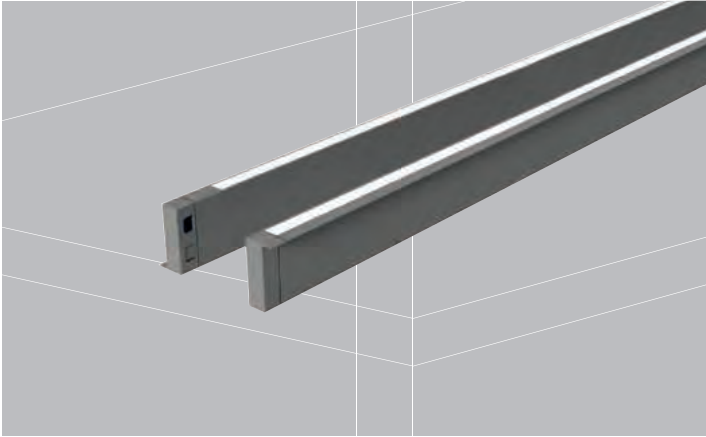



FEATURES

- Adjustable or Optional color temperature (3000K、 4000K、 6000K) , Adjustable brilliance,lighting balance, service life over 70000 hours.
- Lighting upward and downward, front or rear assembly.
- Silicone lampshade, ultra-narrow design, Ultra-thin wire, no need drilling hole, Cuttable length.
- Ra>90.

COLOR TEMPERATURE ADJUSTABLE




INSTALLATION INSTRUCTIONS



TECHNICAL DETAILS

Color Temperature	Item No.	Size (mm)	Power	Remark	
	Highclass grey	Matte black			
(3000K、 4000K、 6000K)	12440043	12440045	400mm	8W	
	12440063	12440065	600mm	12W	
	12440083	12440085	800mm	16W	
	12440103	12440105	1000mm	20W	
	12440123	12440125	1200mm	24W	
	12440153	12440155	1500mm	30W	
	12440183	12440185	1800mm	36W	
3000K	12443043	12443045	400mm	8W	
	12443063	12443065	600mm	12W	
	12443083	12443085	800mm	16W	
	12443103	12443105	1000mm	20W	
	12443123	12443125	1200mm	24W	
	12443153	12443155	1500mm	30W	
	12443183	12443185	1800mm	36W	
4000K	12444043	12444045	400mm	8W	
	12444063	12444065	600mm	12W	
	12444083	12444085	800mm	16W	
	12444103	12444105	1000mm	20W	
	12444123	12444125	1200mm	24W	
	12444153	12444155	1500mm	30W	
	12444183	12444185	1800mm	36W	
	12449991	bordeaux red	/	/	custom size
	12449992	champagne gold	/	/	custom size



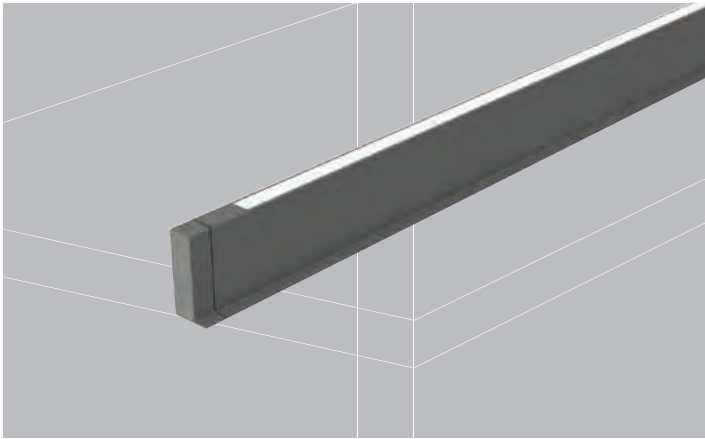




FEATURES

- Adjustable or Optional color temperature (3000K、 4000K、 6000K) , Adjustable brilliance,lighting balance, service life over 70000 hours.
- Lighting downward, front or rear assembly.
- Silicone lampshade, ultra-narrow design, Ultra-thin wire, no need drilling hole, Cuttable length.
- Ra>90.

COLOR TEMPERATURE ADJUSTABLE



INSTALLATION INSTRUCTIONS



TECHNICAL DETAILS

Color Temperature	Item No.	Size (mm)	Power	Remark	
	Highclass grey	Matte black			
(3000K、 4000K、 6000K)	12450043	12450045	400mm	4W	
	12450063	12450065	600mm	6W	
	12450083	12450085	800mm	8W	
	12450103	12450105	1000mm	10W	
	12450123	12450125	1200mm	12W	
	12450153	12450155	1500mm	15W	
	12450183	12450185	1800mm	18W	both ends bonding wire with 2pcs of end cap
	12450283	12450285	2800mm	28W	
3000K	12453043	12453045	400mm	4W	
	12453063	12453065	600mm	6W	
	12453083	12453085	800mm	8W	
	12453103	12453105	1000mm	10W	
	12453123	12453125	1200mm	12W	
	12453153	12453155	1500mm	15W	
	12453183	12453185	1800mm	18W	both ends bonding wire with 2pcs of end cap
	12453283	12453285	2800mm	28W	
4000K	12454043	12454045	400mm	4W	
	12454063	12454065	600mm	6W	
	12454083	12454085	800mm	8W	
	12454103	12454105	1000mm	10W	
	12454123	12454125	1200mm	12W	
	12454153	12454155	1500mm	15W	
	12454183	12454185	1800mm	18W	both ends bonding wire with 2pcs of end cap
	12454283	12454285	2800mm	28W	
	12459991	bordeaux red	/	/	custom size
	12459992	champagne gold	/	/	custom size



Elliott Ewitt Stribe

Bananas

NUOMI




FEATURES

- Adjustable or Optional color temperature (3000K、4000K、6000K) , Adjustable brilliance,lighting balance, service life over 70000 hours.
- Refrational lighting,cutttable length.
- Aluminium profile, warterborne fluorocarbon coating technology, Silicone lampshade, ultra-narrow design.
- Ra>90.

COLOR TEMPERATURE ADJUSTABLE



INSTALLATION INSTRUCTIONS

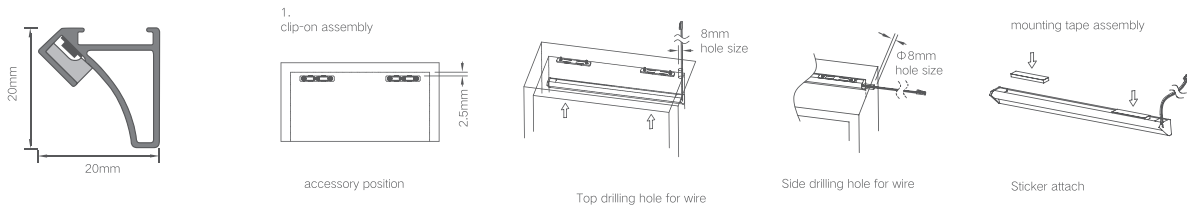

TECHNICAL DETAILS


Color Temperature	Item No.	Size (mm)	Power	Remark	
	Highclass grey	Matte black			
(3000K、4000K、6000K)	12460043	12460045	400mm	4W	
	12460063	12460065	600mm	6W	
	12460083	12460085	800mm	8W	
	12460103	12460105	1000mm	10W	
	12460123	12460125	1200mm	12W	
	12460153	12460155	1500mm	15W	
	12460183	12460185	1800mm	18W	both ends bonding wire with 2pcs of end cap
	12460283	12460285	2800mm	28W	
3000K	12463043	12463045	400mm	4W	
	12463063	12463065	600mm	6W	
	12463083	12463085	800mm	8W	
	12463103	12463105	1000mm	10W	
	12463123	12463125	1200mm	12W	
	12463153	12463155	1500mm	15W	
	12463183	12463185	1800mm	18W	both ends bonding wire with 2pcs of end cap
	12463283	12463285	2800mm	28W	
4000K	12464043	12464045	400mm	4W	
	12464063	12464065	600mm	6W	
	12464083	12464085	800mm	8W	
	12464103	12464105	1000mm	10W	
	12464123	12464125	1200mm	12W	
	12464153	12464155	1500mm	15W	
	12464183	12464185	1800mm	18W	both ends bonding wire with 2pcs of end cap
	12464283	12464285	2800mm	28W	
	12469991	bordeaux red	/	/	custom size
	12469992	champagne gold	/	/	custom size



TO KILL A MOCKINGBIRD
SOME ARE MORE EQUAL THAN OTHERS
HARPOLEND
DAN BARON

MY MOTHER'S RING
TO KILL A MOCKINGBIRD
MY MOTHER'S RING
TO KILL A MOCKINGBIRD

NUOMI

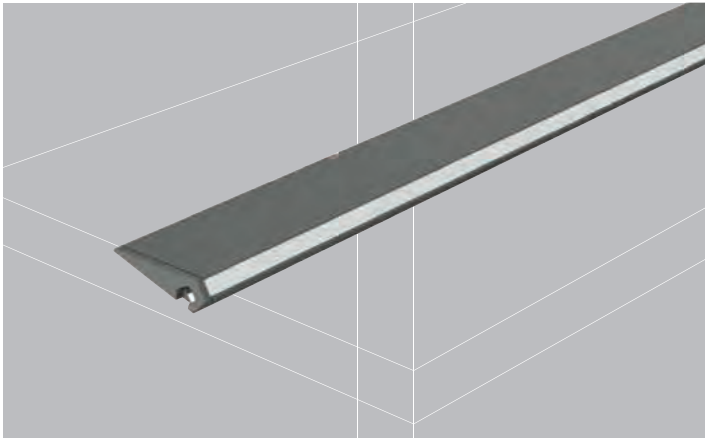


FEATURES

- Adjustable or Optional color temperature (3000K、4000K、6000K) , Adjustable brilliance,lighting balance, service life over 70000 hours.
- Cutable length, concealed installation, Lighting inwards.
- Aluminium profile, waterborne fluorocarbon coating technology, Silicone lampshade, ultra-narrow design.
- Ra>90.

COLOR TEMPERATURE ADJUSTABLE



INSTALLATION INSTRUCTIONS

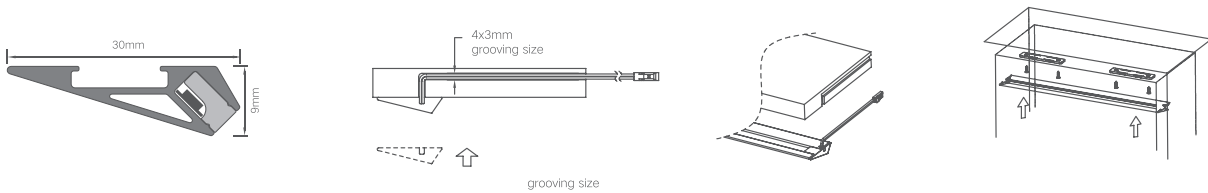

TECHNICAL DETAILS

Color Temperature	Item No.	Size (mm)	Power	Remark	
	Highclass grey	Matte black			
(3000K、4000K、6000K)	12430043	12430045	400mm	4W	
	12430063	12430065	600mm	6W	
	12430083	12430085	800mm	8W	
	12430103	12430105	1000mm	10W	
	12430123	12430125	1200mm	12W	
	12430153	12430155	1500mm	15W	
	12430183	12430185	1800mm	18W	both ends bonding wire with 2pcs of end cap
	12430283	12430285	2800mm	28W	
3000K	12433043	12433045	400mm	4W	
	12433063	12433065	600mm	6W	
	12433083	12433085	800mm	8W	
	12433103	12433105	1000mm	10W	
	12433123	12433125	1200mm	12W	
	12433153	12433155	1500mm	15W	
	12433183	12433185	1800mm	18W	both ends bonding wire with 2pcs of end cap
	12433283	12433285	2800mm	28W	
4000K	12434043	12434045	400mm	4W	
	12434063	12434065	600mm	6W	
	12434083	12434085	800mm	8W	
	12434103	12434105	1000mm	10W	
	12434123	12434125	1200mm	12W	
	12434153	12434155	1500mm	15W	
	12434183	12434185	1800mm	18W	both ends bonding wire with 2pcs of end cap
	12434283	12434285	2800mm	28W	
	12439991	bordeaux red	/	/	custom size
	12439992	champagne gold	/	/	custom size




SENSORY LIGHT



The design is human-centric, with beautiful lines that can be easily integrated into different styles of home life, easily control any space, and restore the purity and beauty of life.



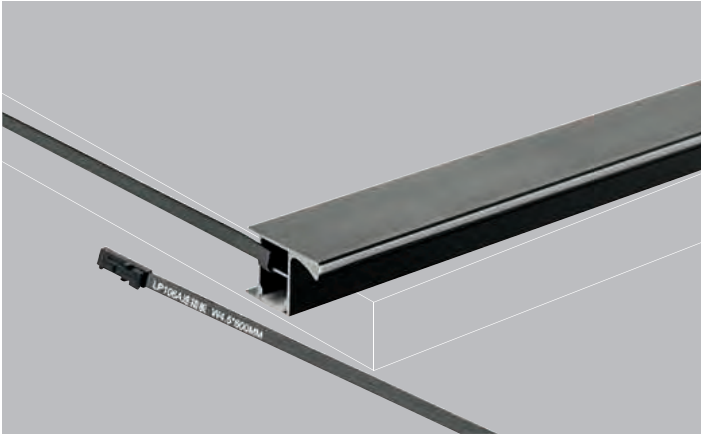




FEATURES

- Optional color temperature, Adjustable brilliance, lighting balance, service life over 70000 hours.
- No need trough, lighting downward, hand sweep sensor, suitable for wall cupboard, used in wardrobe strong load-bearing.
- Ultra thin wire, no need hole drilling.
- Ra>90.

COLOR TEMPERATURE ADJUSTABLE



INSTALLATION INSTRUCTIONS

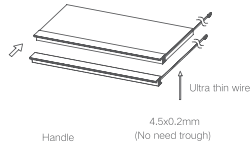

TECHNICAL DETAILS

Color Temperature	Item No.			Size (mm)	Power	Sensor switch
3000K	Champagne golden	Highclass grey	Matte black			
	12513042	12513043	12513045	413mm	5W	hand sweep sensor switch
	12513062	12513063	12513065	563mm	6W	
	12513082	12513083	12513085	763mm	8W	
	12513092	12513093	12513095	863mm	9W	
4000K	12514042	12514043	12514045	413mm	5W	
4000K	12514062	12514063	12514065	563mm	6W	hand sweep sensor switch
	12514082	12514083	12514085	763mm	8W	
	12514092	12514093	12514095	863mm	9W	







FEATURES

- Optional color temperature, Adjustable brilliance, lighting balance, service life over 70000 hours.
- Used in wardrobe, Strong load-bearing.
- Aluminium profile, waterborne fluorocarbon coating technology.
- Ra>90.


COLOR TEMPERATURE ADJUSTABLE




INSTALLATION INSTRUCTIONS



Drilling hole for wire



top install

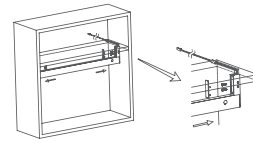

side install

TECHNICAL DETAILS

Color Temperature	Item No.				Size (mm)	Power	Sensor switch
	Bordeaux red	Champagne golden	Highclass grey	Matte black			
3000K	12523061	12523062	12523063	12523065	560mm	6W	Body infrared sensor switch
	12523081	12523082	12523083	12523085	760mm	8W	
	12523091	12523092	12523093	12523095	860mm	9W	
	12523121	12523122	12523123	12523125	1160mm	12W	
4000K	12524061	12524062	12524063	12524065	560mm	6W	Body infrared sensor switch
	12524081	12524082	12524083	12524085	760mm	8W	
	12524091	12524092	12524093	12524095	860mm	9W	
	12524121	12524122	12524123	12524125	1160mm	12W	



COMMON SERIES



The texture of the material is mapped to the warm and natural beauty, giving the space a natural stretch and relaxation, bringing a more comfortable life experience.



NIJOMI




FEATURES

- Adjustable or Optional color temperature (3000K、 4000K、 6000K) , Adjustable brilliance,lighting balance, service life over 70000 hours.
- three sides lighting, Suitable for 6-8mm thickness glass.
- Applicable for layered glass of wardrobe or open cabinet
- Cuttable length.
- Ra>90.

COLOR TEMPERATURE ADJUSTABLE




INSTALLATION INSTRUCTIONS

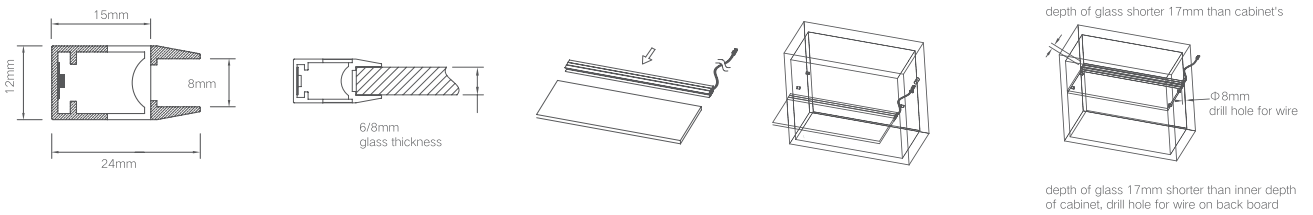

TECHNICAL DETAILS

Color Temperature	Item No.	Color	Size (mm)	Power	Remark	Sensor switch
(3000K、 4000K、 6000K)	12620043	highclass grey	400mm	4W		
	12620063	highclass grey	600mm	6W		
	12620083	highclass grey	800mm	8W		
	12620103	highclass grey	1000mm	10W		
	12620123	highclass grey	1200mm	12W	both ends bonding wire	no sensor switch (external available)
3000K	12623043	highclass grey	400mm	4W		
	12623063	highclass grey	600mm	6W		
	12623083	highclass grey	800mm	8W		
	12623103	highclass grey	1000mm	10W		
	12623123	highclass grey	1200mm	12W	both ends bonding wire	
4000K	12624043	highclass grey	400mm	4W		
	12624063	highclass grey	600mm	6W		no sensor switch (external available)
	12624083	highclass grey	800mm	8W		
	12624103	highclass grey	1000mm	10W		
	12624123	highclass grey	1200mm	12W	both ends bonding wir	



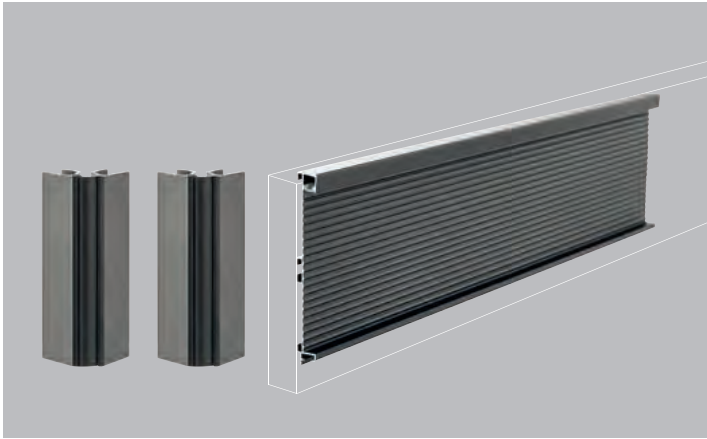


FEATURES

- Adjustable light color temperature and brilliance, lighting balance, service life over 70000 hours.
- Cutable length, Lighting downward
Applicable for cabinet, wardrobe baseboard.
- Waterproof.
- Ra>90.

COLOR TEMPERATURE ADJUSTABLE



INSTALLATION INSTRUCTIONS

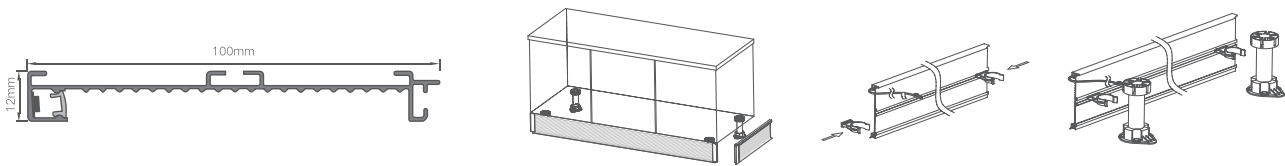

TECHNICAL DETAILS

Color Temperature	Item No.	Aluminium color	Size (mm)	Power	Remark	Sensor switch
(3000K、 4000K、6000K)	12650302	champagne gold	3000mm	10W/m		
	12650303	highclass grey	3000mm	10W/m		no sensor switch (external available)
	12650305	matte black	3000mm	10W/m		





FEATURES

- Adjustable or Optional color temperature (3000K、 4000K、 6000K) , Adjustable brilliance,lighting balance, service life over 70000 hours.
- Superior LED chip source, bilateral circuit board, precise chip, standard production ; cuttable length.
- 12V power source, safe and stable.
- Ra>90.


COLOR TEMPERATURE ADJUSTABLE

6000K

4000K

3000K

INSTALLATION INSTRUCTIONS

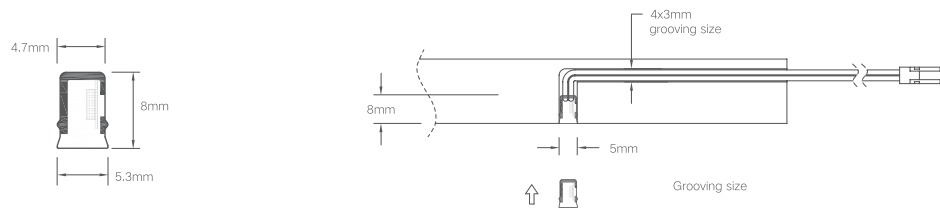

TECHNICAL DETAILS

Color Temperature	Item No.	Size (mm)	Power	Remark	Sensor switch
(3000K、 4000K、 6000K)	12670049	400mm	4W		
	12670069	600mm	6W		
	12670089	800mm	8W		
	12670109	1000mm	10W		Constant voltage driver
	12670129	1200mm	12W		
	12670289	2800mm	28W	both ends bonding wire	
	12670509	5000mm	50W		
3000K	12673049	400mm	4W		
	12673069	600mm	6W		
	12673089	800mm	8W		
	12673109	1000mm	10W		Constant voltage driver
	12673129	1200mm	12W		
	12673289	2800mm	28W	both ends bonding wire	
4000K	12674049	400mm	4W		
	12674069	600mm	6W		
	12674089	800mm	8W		
	12674109	1000mm	10W		Constant voltage driver
	12674129	1200mm	12W		
	12674289	2800mm	28W	both ends bonding wire	
	12674509	5000mm	50W		



SMART CONTROL SYSTEM AND ACCESSORIES



Convenient wireless installation, support wireless touch sensing, wireless human body sensing, wireless door control or hand sweep (integrated switchable) sensing, etc. Master the core technology, create an intelligent living space, let you enjoy a convenient life.


ULTRA-THIN CONSTANT VOLTAGE POWER SOURCE WITH SMART CONTROL




CHARACTERISTICS

- 3C certificate, meet UL, CE, KC standard.
- Overload protection, stable power supply.
- Strong anti-interference capability.
- Standard equipped with wireless receiver, capable for wireless switch, adjusting color temperature and brilliance.
- 16.5mm thickness, ultra-thin.

INSTALLATION INSTRUCTIONS



fix the power adapter on the cabinet board or wall



connect to 220V power source

TECHNICAL DETAILS

Item No.	Size (mm)	Color	Ac Input	Voltage Output	Power	output control mode
12201020 (LXLD01-12V-15W)	L100xW68xH16.5mm	blue	200-240Vac ~ 0.2A 50/60HZ PF ≥ 0.5	12V/1.67A	20W	wire or wireless
12201030 (LXLD02-12V-30W)	L140xW68xH16.5mm	blue	200-240Vac ~ 0.2A 50/60HZ PF ≥ 0.9	12V/2.5A	30W	
12201060 (LXLD03-12V-60W)	L160xW68xH16.5mm	blue	200-240Vac ~ 0.38A 50/60HZ PF ≥ 0.9	12V/5A	60W	
12201080 (LXLD04-12V-80W)	L215xW68xH16.5mm	blue	200-240Vac ~ 0.55A 50/60HZ PF ≥ 0.9	12V/6.67A	80W	


ULTRA-THIN CONSTANT VOLTAGE POWER SOURCE WITH SMART CONTROL




CHARACTERISTICS

- Overload protection, stable power supply.
- Strong anti-interference capability.
- 16.5mm thickness, ultra-thin.

INSTALLATION INSTRUCTIONS



fix the power adapter on the cabinet board or wall



connect to 220V power source

TECHNICAL DETAILS

Item No.	Size (mm)	Color	Ac Input	Voltage Output	Power	output control mode
12202024 (LXLD24-12V-24W)	L100xW68xH16.5mm	Black	200-240Vac ~ 0.3A 50/60HZ PF ≥ 0.5	12V/2A	24W	wire or wireless
12202036 (LXLD25-12V-36W)	L140xW68xH16.5mm	Black	200-240Vac ~ 0.45A 50/60HZ PF ≥ 0.5	12V/3A	36W	
12202060 (LXLD26-12V-60W)	L160xW68xH16.5mm	Black	200-240Vac ~ 0.7A 50/60HZ PF ≥ 0.5	12V/5A	60W	
12202100 (LXLD27-12V-90W)	L215xW68xH16.5mm	Black	200-240Vac ~ 1.1A 50/60HZ PF ≥ 0.5	12V/8.33A	100W	


WIRELESS TOUCH SENSOR SIGNAL SWITCH



CHARACTERISTICS

- Wireless.
- Over 365 days ultra-long life battery, easy to assemble.
- Touch control, wireless.
- Safe and stable, meet standard of RoHS.

INSTALLATION INSTRUCTIONS

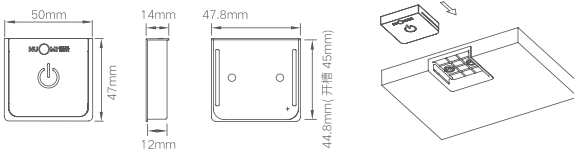

TECHNICAL DETAILS

Item No.	12221001
Size (mm)	Φ35X12.6mm Cover (40X40mm)
Input voltage	3VDC
Standby current	3-10UA
Sensing distance	Capacitive touch
Signal induction	5m
Installation	Built-in


WIRELESS HUMAN BODY INFRARED SENSOR SWITCH



CHARACTERISTICS

- Wireless.
- Over 365 days ultra-long life battery, easy to assemble.
- Body infrared sensor, wireless switch.
- Safe and stable, meet standard of RoHS.
- Sensing range within 10m, adjustable light luminance and color temperature.

INSTALLATION INSTRUCTIONS

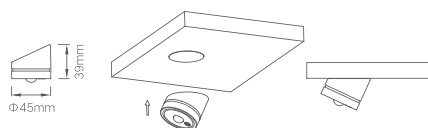

TECHNICAL DETAILS

Item No.	12221002
Size (mm)	Φ45X40mm
Input voltage	3VDC
Standby current	3-10UA
Sensing distance	body infrared sensor
Sensing distance	1-3m
Installation	30 seconds
Installation	magnetic surface mounted


WIRELESS DOOR CONTROL & HAND SWEEP SENSOR SWITCH



CHARACTERISTICS

- Over 365 days ultra-long life button battery, easy to assemble.
- Door control and hand sweep sensor wireless switch.
- Safe and stable, meet standard of RoHS.

INSTALLATION INSTRUCTIONS

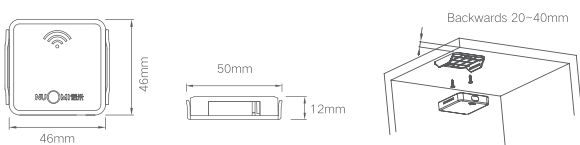

TECHNICAL DETAILS

Item No.	12221003
Size (mm)	L50xW46xH12mm
Color	Black
Input voltage	3VDC
Operating current	3~10uA
Sensing distance	20~40mm
Signal induction	5m
Installation	Surface mounted / Built-in


DOOR CONTROL & HAND- SWEEP SENSOR SWITCH



CHARACTERISTICS

- Door control and hand sweep sensor press small hole with stick to trigger switch.
- Safe and stable, meet standard of RoHS.
- Infrared induction sensor.
- Separating dismountable structure design, convenient maintenance.

INSTALLATION INSTRUCTIONS

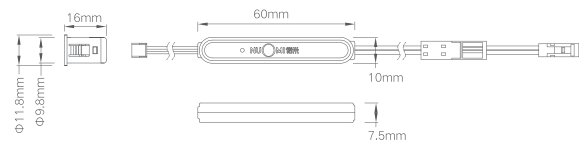

TECHNICAL DETAILS

Item No.	12222001
Size (mm)	Φ10x15mm
Color	Black
Input voltage	DC12-24V
Sensing distance	hand sweep 5-8CM door control 3-5CM
Installation	(ole Φ 10mm) Surface mounted / Built-in


DOOR CONTROL & HAND SWEEP SENSORY POWER SWITCH



CHARACTERISTICS

- High quality imported infrared photoelectric sensor.
- Convenient switching of door control & hand-sweep control.
- Separating dismountable structure design, convenient maintenance.

INSTALLATION INSTRUCTIONS

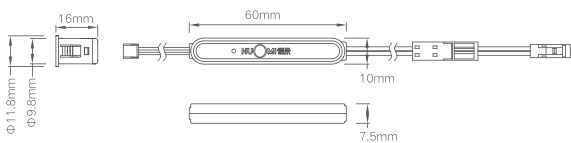

TECHNICAL DETAILS

Item No.	12222006
Size (mm)	Φ10x15mm
Color	Black
Input voltage	DC12-24V
Output current	36W
Sensing distance	hand sweep 5-8CM door control 3-5CM
Installation	(hole φ 12mm) Surface mounted / Built-in


DOUBLE CONTROL OF DOOR SENSOR SWITCH(3P)



CHARACTERISTICS

- Double control of door, lighting up while first door open, light goes off while second door closes.
- Safe and stable, meet standard of RoHS.
- Wireless control through infrared.
- Separating dismountable structure design, convenient maintenance.

INSTALLATION INSTRUCTIONS

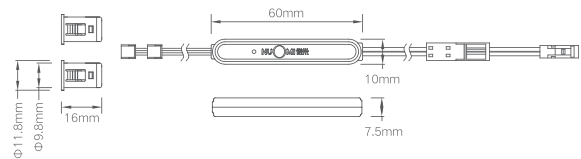

TECHNICAL DETAILS

Item No.	12222002
Size (mm)	Φ10x15mm
Color	Black
Input voltage	DC12-24V
Sensing distance	door control 3-5CM
Installation	(hole φ 10mm) Surface mounted / Built-in


DOUBLE CONTROL OF DOOR POWER SWITCH(2P)



CHARACTERISTICS

- Double control of door, lighting up while first door open, light goes off while second door closes.
- Material: ABS.
- Infrared sensor switch.
- Separating dismountable structure design, convenient maintenance.

INSTALLATION INSTRUCTIONS

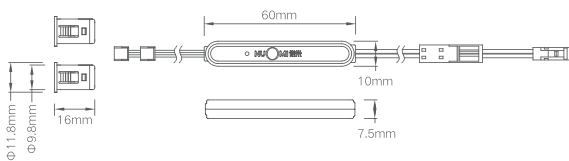

TECHNICAL DETAILS

Item No.	12222003
Size (mm)	Φ10x15mm
Color	Black
Input voltage	DC12-24V
Output current	36W
Sensing distance	door control 3-5CM
Installation	(hole Φ 10mm) Surface mounted / Built-in


TOUCH SENSOR SIGNAL SWITCH



CHARACTERISTICS

- Capacitive touch sensor switch, lighting stepless adjustable.
- Material: ABS.

INSTALLATION INSTRUCTIONS

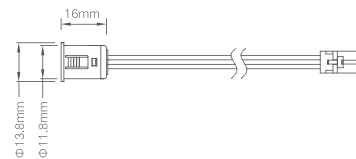

TECHNICAL DETAILS

Item No.	12222004
Size (mm)	Φ12x15mm
Color	Black
Input voltage	DC12-24V
Sensing distance	
Installation	(hole Φ 10mm) Surface mounted / Built-in


HUMAN BODY INFRARED SENSOR SIGNAL SWITCH



CHARACTERISTICS

- Infrared sensor switch.
- Material: ABS.
- Strong anti-interference capacity, output over 30 seconds.

INSTALLATION INSTRUCTIONS

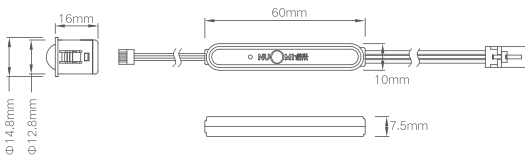

TECHNICAL DETAILS

Item No.	12222005
Size (mm)	Φ13x17mm
Color	Black
Input voltage	DC12-24V
Sensing distance	1-3m
Delay	30
Installation	(hole Φ 13mm) Surface mounted / Built-in


WIRELESS CONTROL BOX FOR POWER SOURCE



CHARACTERISTICS

- Touch sensor and wireless receiving control switch.
- Adjust brightness and color temperature.
- Status light: two colors (red/brown).
- Material: PC FR4.

INSTALLATION INSTRUCTIONS

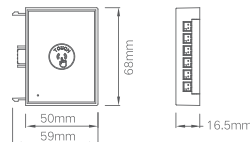

TECHNICAL DETAILS

Item No.	12281001
Size (mm)	59x68x16.5mm
Color	Black
Input voltage	12VDC
Output current	100W
Antenna	onboard or internal PCB wire
Installation	< 10M (spacious)


WIRELESS CONTROL BOX FOR POWRR SOURCE (VOICE CONTROL)



CHARACTERISTICS

- Touch sensing and Tmall Genie control light on and off, adjust brightness and color temperature.
- Status light: two colors (red/brown).
- Material: PC FR4.

INSTALLATION INSTRUCTIONS



TECHNICAL DETAILS

Item No.	12581002
Size (mm)	59x68x16.5mm
Color	Black
Input voltage	12VDC
Output current	100W
Antenna	PCB
Installation	< 10M

ROUND DRIVE PARALLEL CONTROL BOX



CHARACTERISTICS

- One signal switch control 4 power source.
- Support stackable usage, maximum 10 pcs of power source.

INSTALLATION INSTRUCTIONS



TECHNICAL DETAILS

Item No.	12281005
Size (mm)	∅51.5X15.5mm
Color	Black
Standard	4 3PIN Signal extension wire
Material	UL2468 22AWG


SIGNAL JUNCTION BOX



CHARACTERISTICS

- wire sensor switch, 5 output port
- power over 60W, there is one port out of control for wire distribution extension
- one signal switch connect distribution box to control 5 output port, the left one is out of control for stackable usage.

INSTALLATION INSTRUCTIONS



TECHNICAL DETAILS

Item No.	12281006
Size (mm)	Φ51.5X15.5mm
Color	Black
Input voltage	12VDC
Output current	36W
Output control	Wire switch
Material	UL2468 22AWG 1M Dupont port


LED SIX-BIT JUNCTION BOX



CHARACTERISTICS

- Superior ABS.
- UL, RoHS, CE certificate.

INSTALLATION INSTRUCTIONS

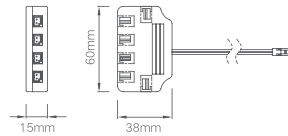

TECHNICAL DETAILS

Item No.	12281004
Size (mm)	0.3M/0.6M/1M
Color	Black
Material	UL2468、22AWG


LED THREE-BIT JUNCTION BOX



CHARACTERISTICS

- Superior ABS.
- UL,RoHS, CE certificate.

INSTALLATION INSTRUCTIONS

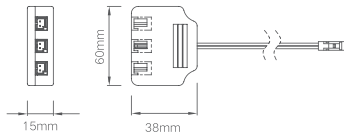

TECHNICAL DETAILS

Item No.	12281003
Size (mm)	0.3M/0.6M/1M
Color	Black
Material	UL2468、22AWG

LED EXTENSION WIRE



CHARACTERISTICS

- Superior ABS.
- UL,RoHS, CE certificate.

TECHNICAL DETAILS

Item No.	12282001
Size (mm)	0.3M/0.6M/1M
Color	Black
Material	UL2468、22AWG、2pin

SIGNAL EXTENSION CORD



CHARACTERISTICS

- Superior ABS.
- UL,RoHS, CE certificate.

TECHNICAL DETAILS

Item No.	12282002
Size (mm)	0.3M/0.6M/1M
Color	Black
Material	UL2468、22AWG、3pin

UNIVERSAL PLUG WIRE




CHARACTERISTICS

- Superior ABS.
- UL,RoHS, CE certificate.

TECHNICAL DETAILS

Item No.	12282003
Size (mm)	L813 black plug wireL=1500mm , tail split20mm , 1.5-2mm
Color	Black
Material	UL2468 22AWG 2C black strip

SMART
LIGHTING SOLUTION

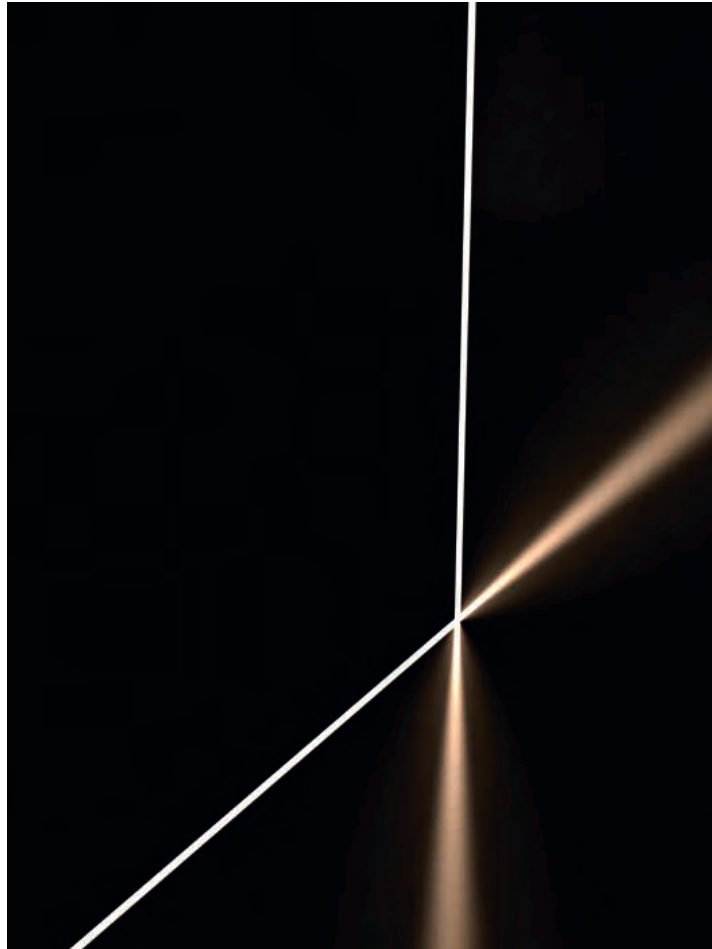

NUOMI

LLC "Furni Smart Group"
is the official representative
of Nuomi in Ukraine.
Ukraine. Ternopil,
str. Promyslova 26.
+380671008858
nuomi.com.ua
sale@nuomi.com.ua